


# GM250-127-10-15

## Thermoelectric Generator Module

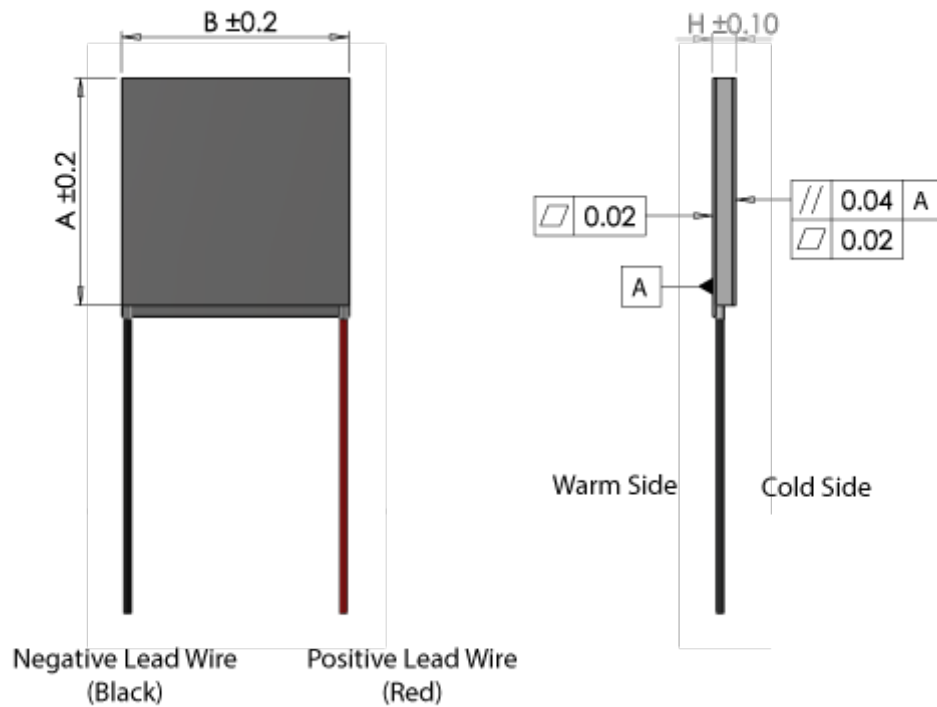

### Geometric Dimensions

A	30mm
B	30mm
H	3.7mm




Parameters for hot side temp 250°C and cold side temp 30°C

Matched load output power	4.02W
Matched load resistance	6.89Ω ± 15%
Open circuit voltage	10.52V
Matched load output	0.76A
Matched load output voltage	5.26V
Heat flow through module	~80.4W
Maximum compress (non-destructive)	1.2MPa
Maximum operation temperature	Hot side - 250°C. Cold side - 175°C

### Features


- Compact structure (no moving parts)
- Reliable performance
- Maintenance-free
- Noise-free operation
- Low-carbon, green technology



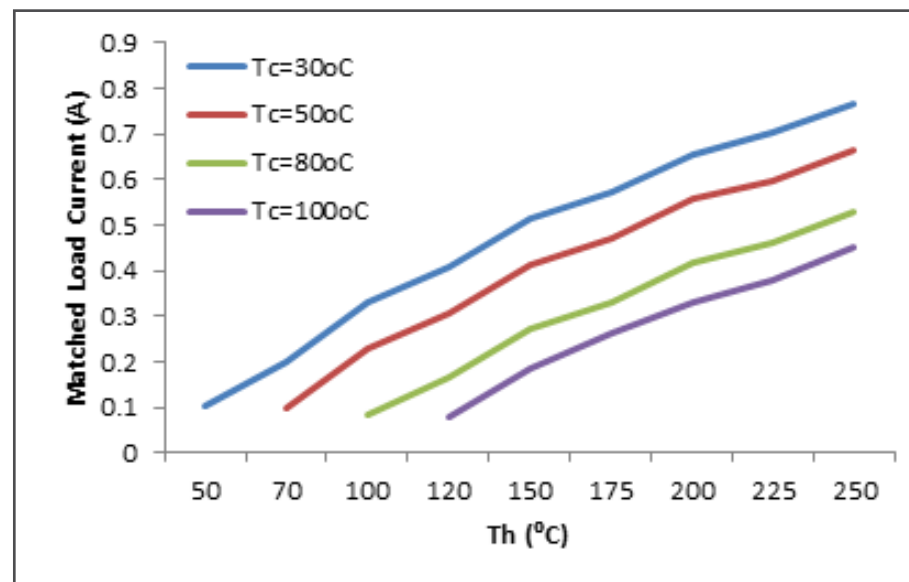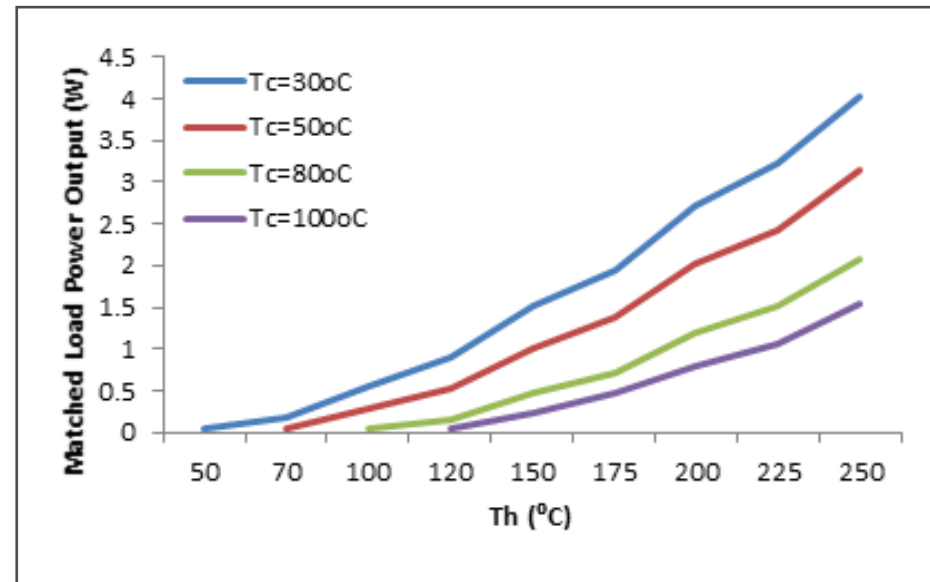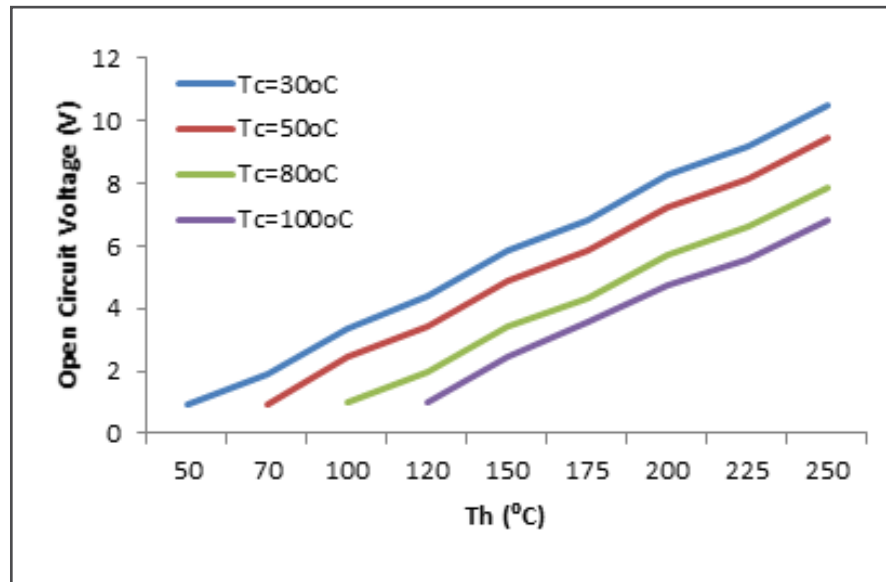

Note: Th = hot side temperature



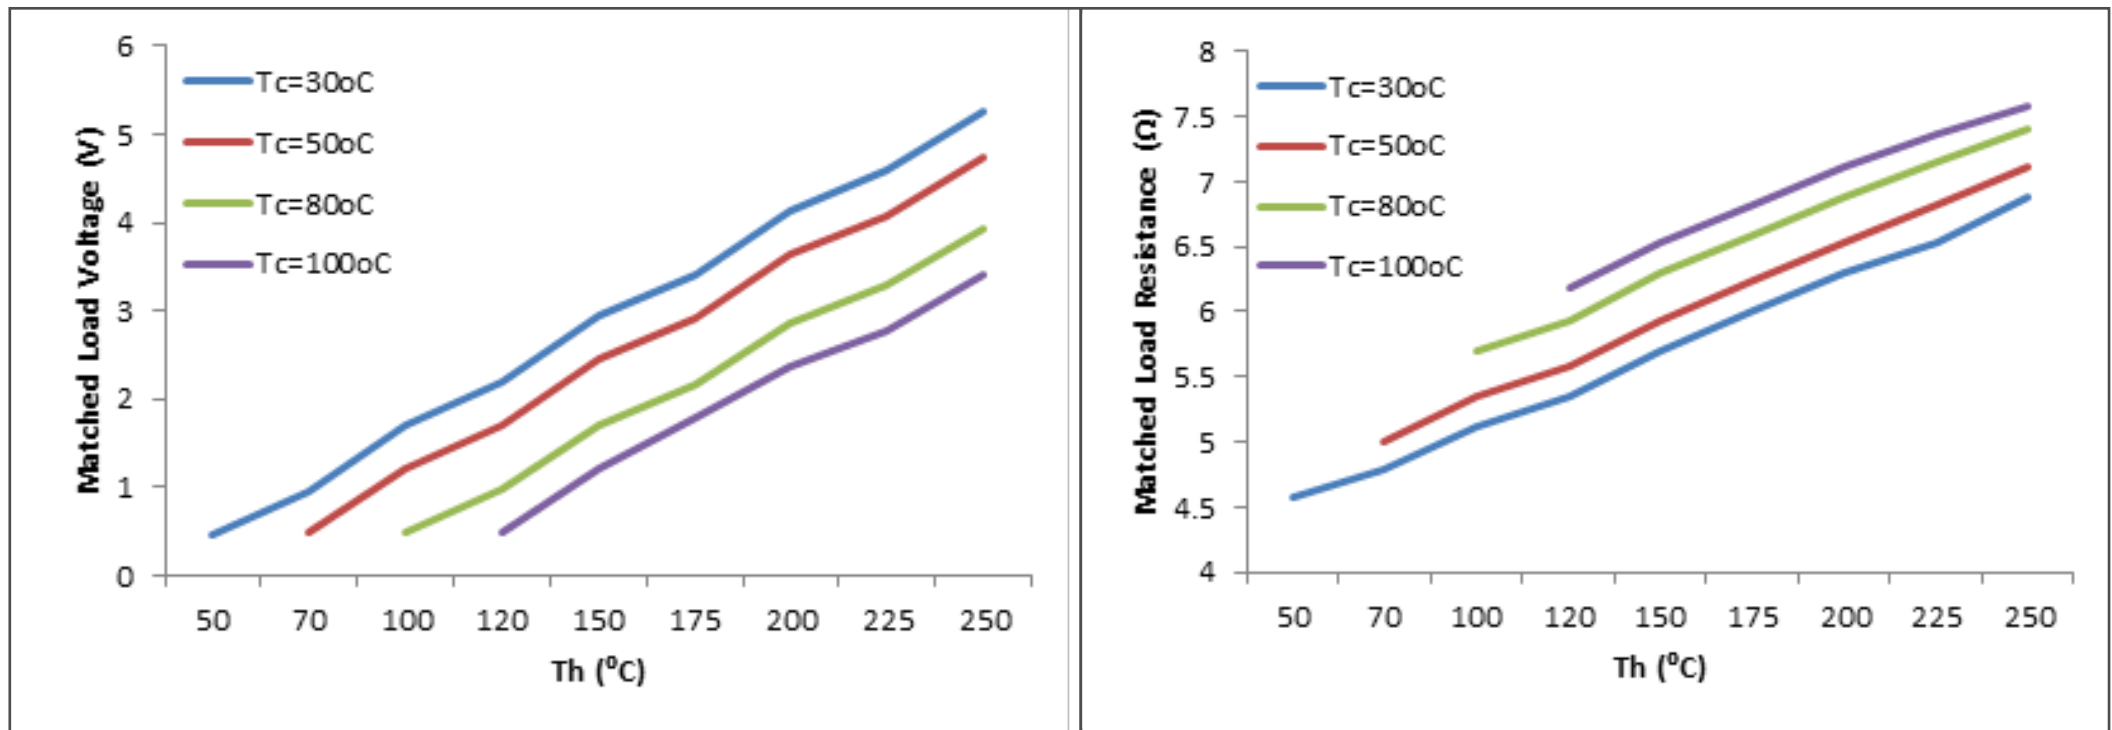

Note: Th = hot side temperature

