Transformers

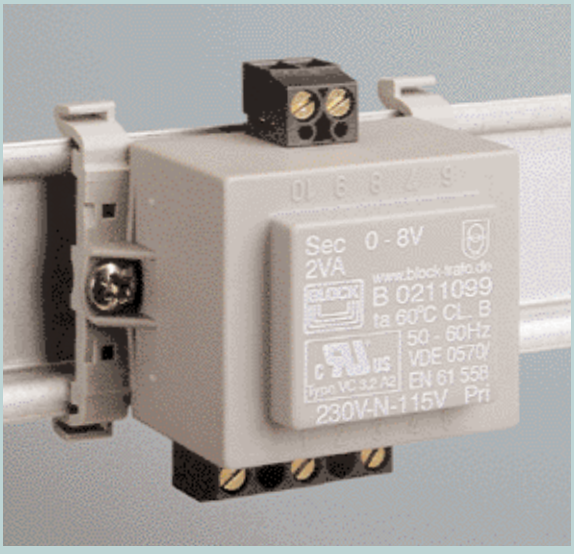

Type		FGT 300	FGT 301	FGT 314	FGT 315
For use with DC supplied fans of the following voltages:*	[V]	**12**	**12**	**24**	**24**
Primary Voltage	[V AC]	115/230	115/230	115/230	115/230
Supply Frequency	[Hz]	50 - 60	50 - 60	50 - 60	50 - 60
Secondary Voltage	[V AC]	8	8	18	18
Maximum operating Temperature	[°C]	60	60	60	60
Power Rating	[VA]	2	2	2	2
Protection Class		II	II	II	II
Dimensions	WxLxH [mm]	53x56x36**	53x56x31	53x56x36**	53x56x31
Mounting hole diameter	[mm]	3	3	3	3
Weight	[gms]	165	165	165	165
Supplied with DIN Rail mounting clips		Y	N	Y	N

* In combination with Smartcon-Wire (with integrated rectifier)
** Where DIN Rail mounts are fitted, height measured from rail

Features
– Dual primary voltage connections
– Compact
– Ready for fitting
– Screw terminal connection
– UL recognised components

Optional
– 35mm DIN Rail mounting clips and screws (EN 50022)

Data is given for illustration purposes only and does not release the customer from independent application tests.

DBK 01.09.03 This information is subject to change without notice.