MGM250-49-10-12HS

Mini Thermoelectric Generator Module

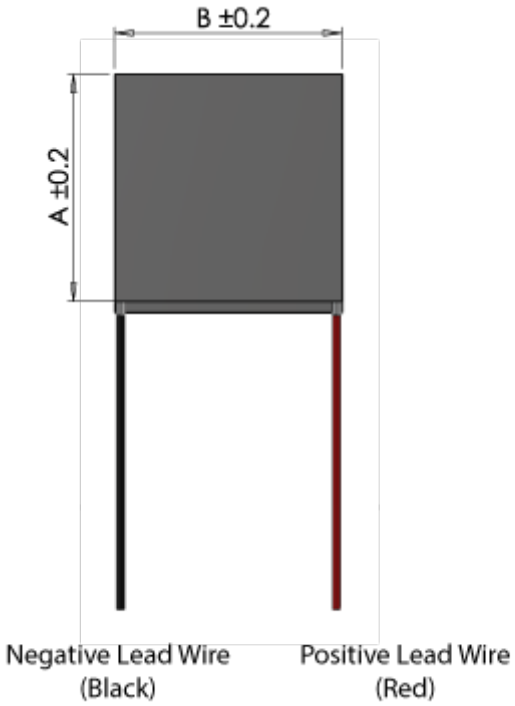

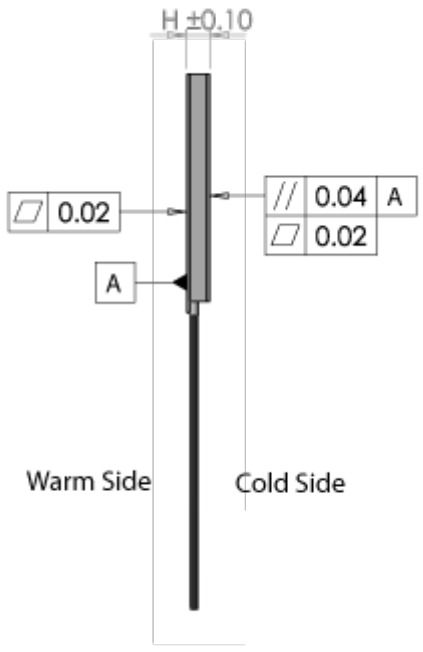

Parameters correct at temp.	Hot side: 250°C Cold side: 30°C	Hot side: 100°C Cold side: 30°C
Matched load output power	1.33W	0.17W
Matched load resistance	2.4Ω ± 15%	1.9Ω ± 15%
Open circuit voltage	3.8V	1.2V
Matched load output	0.7A	0.3A
Matched load output voltage	1.8V	0.6V
Heat flow through module	29W	8.8W
Maximum compress (non-destructive)		1MPa
Maximum operation temperature	Hot side - 250°C. Cold side - 175°C	

Geometric Dimensions

A	18mm
B	18mm
H	2.8mm

Features

- Compact structure (no moving parts)
- Reliable performance
- Maintenance-free
- Noise-free operation
- Low-carbon, green technology
- Sealed with high temperature sealant
- Suitable for continuous high temperature use

Adaptive is a registered trademark of European Thermodynamics Limited.
Web: www.etdyn.com Tel: +44(0)116 279 6899 E-mail: info@etdyn.com

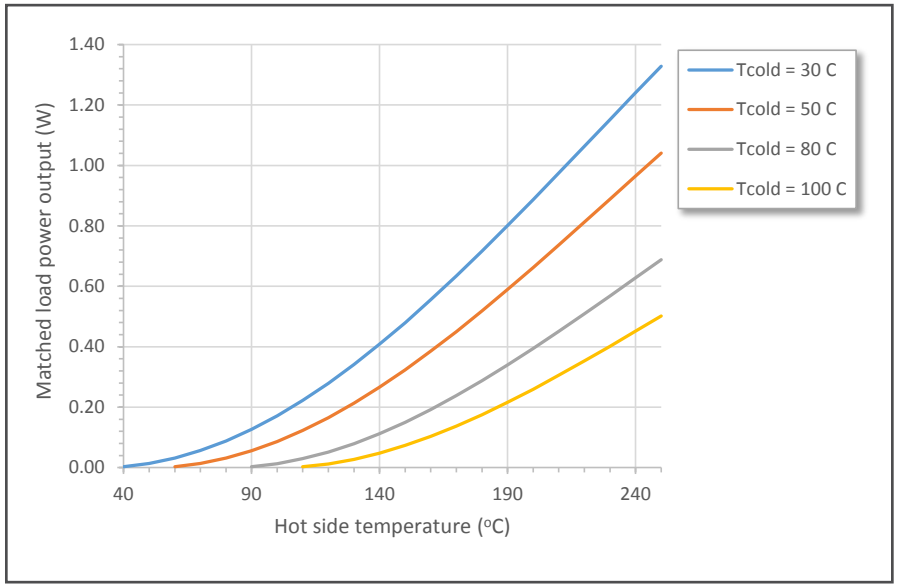
Matched load power output (W)
1.40
1.20
1.00
0.80
0.60
0.40
0.20
0.00
40
90
140
190
240
Hot side temperature (°C)
Tcold = 30 C
Tcold = 50 C
Tcold = 80 C
Tcold = 100 C

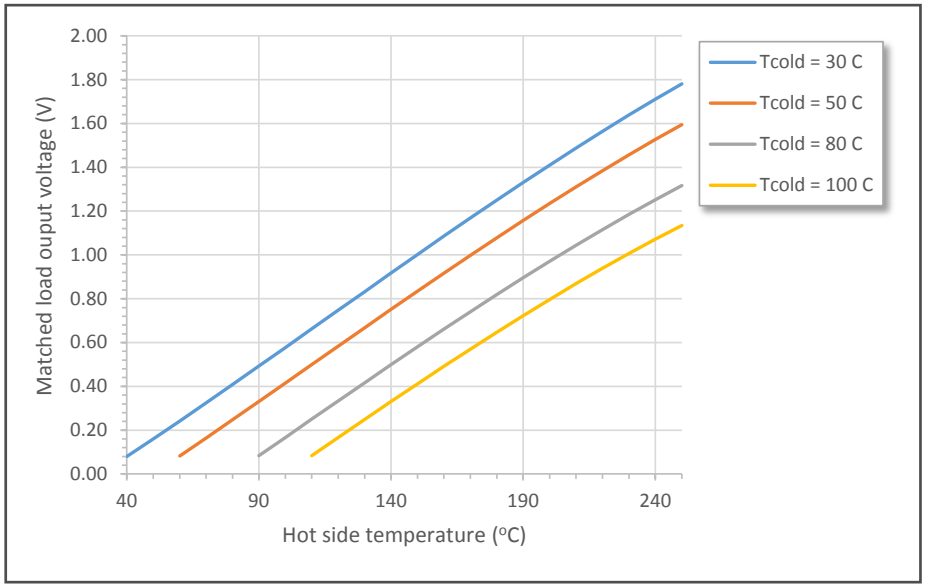
Matched load ouput voltage (V)
2.00
1.80
1.60
1.40
1.20
1.00
0.80
0.60
0.40
0.20
0.00
40
90
140
190
240
Hot side temperature (°C)
Tcold = 30 C
Tcold = 50 C
Tcold = 80 C
Tcold = 100 C

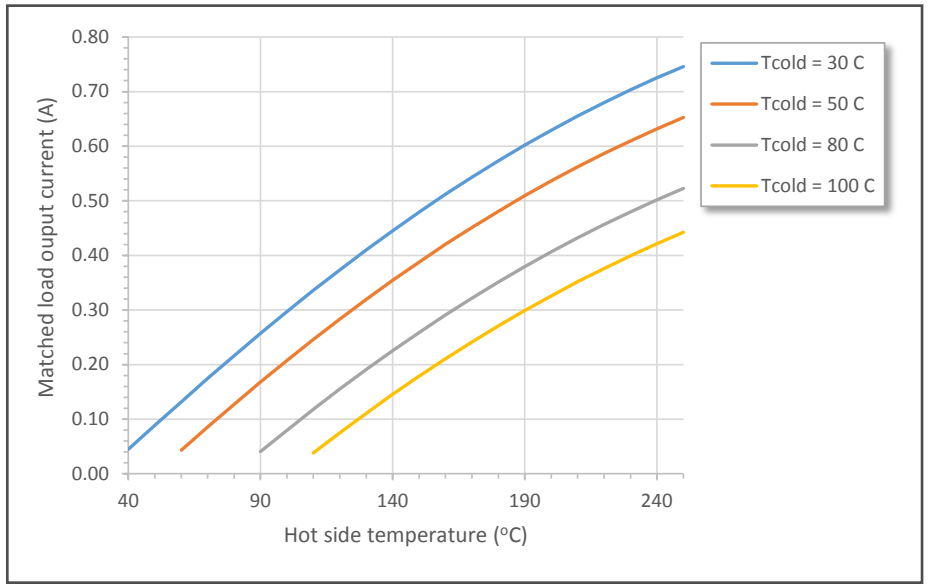
Matched load ouput current (A)
0.80
0.70
0.60
0.50
0.40
0.30
0.20
0.10
0.00
40
90
140
190
240
Hot side temperature (°C)
Tcold = 30 C
Tcold = 50 C
Tcold = 80 C
Tcold = 100 C

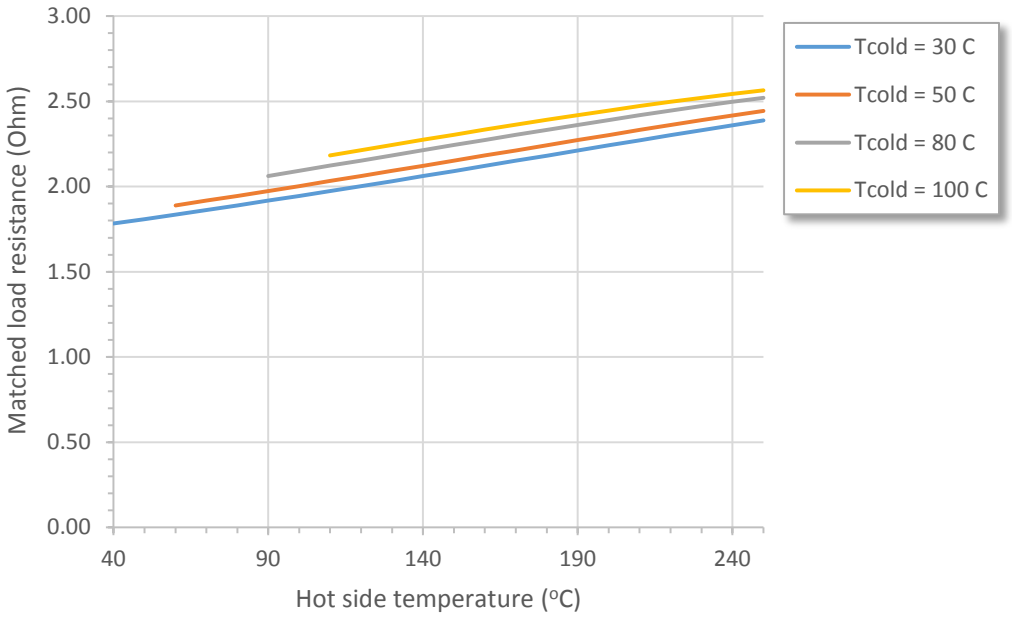
Matched load resistance (Ohm)
3.00
2.50
2.00
1.50
1.00
0.50
0.00
40
90
140
190
240
Hot side temperature (°C)
Tcold = 30 C
Tcold = 50 C
Tcold = 80 C
Tcold = 100 C

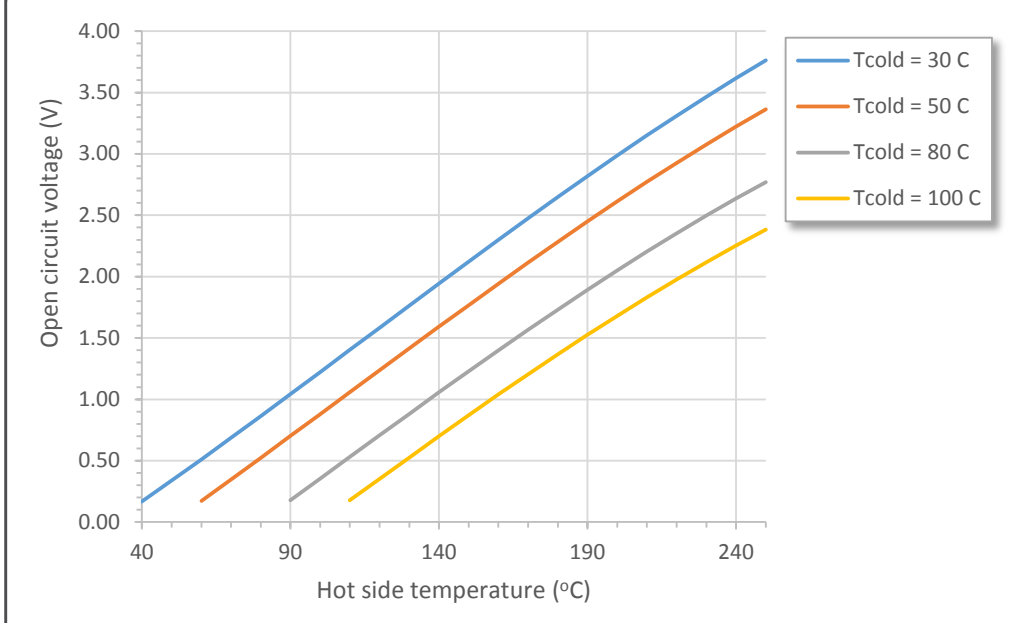
Open circuit voltage (V)
4.00
3.50
3.00
2.50
2.00
1.50
1.00
0.50
0.00
40
90
140
190
240
Hot side temperature (°C)
Tcold = 30 C
Tcold = 50 C
Tcold = 80 C
Tcold = 100 C